


termofriz

TF - K 25 T			
grejač			
HW 03125/450-16-3-4-1"			
	protok vode	21	l/min
	Δp_w	5	kPa
ventilator			
	prečnik elise φ	350	mm
	protok vazduha	2100	m ³ /h
	el. snaga	140	Watt
	napon	220 V, 50 Hz	
temperatura vode	ulazna temperatura vazduha	izlazna temperatura vazduha	toplotni kapacitet
°C	°C	°C	kW
70	-15	27	26,3
	-10	30	24,7
	-5	33	23,1
	0	36	21,5
	5	38	19,9
	10	41	18,3
	15	44	16,7
80	-15	33	29,5
	-10	36	27,9
	-5	39	26,7
	0	41	24,6
	5	44	23
	10	47	21,4
	15	49	19,8
90	-15	38	32,7
	-10	41	31
	-5	44	29,4
	0	47	27
	5	50	26,1
	10	53	24,5
	15	55	22,9

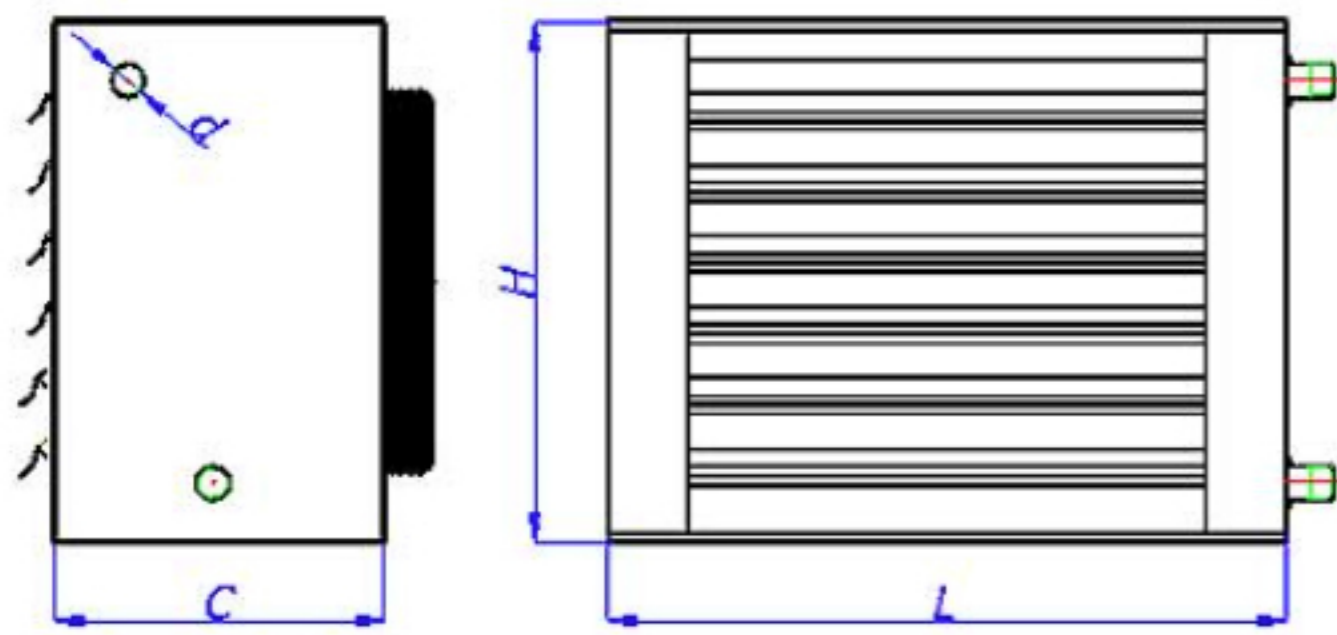

Veličina	L	H	C	d
	mm	mm	mm	coll
TF - K10 T	520	385	265	3/4
TF - K15 T	520	385	265	3/4
TF - K20 T	610	505	265	1
TF - K25 T	610	505	265	1
TF - K 30 T	780	565	315	5/4
TF - K 35 T	780	565	315	5/4
TF - K 17 P	500	505	250	1 / 3/4
TF - K 32 P	640	585	300	5/4 / 1
TF - K 47 P	760	705	350	5/4 / 1
TF- K 55 T				